



CV-10P

DISCO CHECK VALVE/BRASS

GENERAL FEATURES

Check valves are commonly used armatures that can be applied for liquid, gaseous and steam applications. They increase the process safety and can be used instead of complicated armatures. Because of short installation time and installation distance, small dimensions; Ayvaz disco check valve appears to be advantageous.

Check valves provide the flows just one way. When liquid flows through to flowing direction, check valves open and let it pass. But liquid tries to flow opposite direction of flowing, check valves close and prevent passing.

Product Features:

Body: MS58 Brass
Spring, Disc, Segment: Stainless Steel

Working temperature:

According to material from
-10°C to 250°C.

DIAMETERS	
DN (mm)	inch
15-100	1/2" - 4"

Connections:

Wafer type

Applications

- Iron, steel, mining industry
- Heating, ventilation pipelines
- Mineral and oil industry
- Woodworking and paper industry
- The textile industry
- Water, condensate and steam lines
- Shipbuilding

CONNECTION
ÇV-10P
BS 10 tables D, E, F DIN 2501 (pN 6/10/16) ANSI B 16.1 class 125 FF between flanges

Nominal Diameter:

DN15 (1/2") – DN100 (4")

Working Pressure:


Max 16 bar

WEIGHTS									
Connection Type	Flanged								
Diameter (mm)	15	20	25	32	40	50	65	80	100
Weight (kg)	0,09	0.12	0.19	0.36	0.55	0.95	1.26	2.18	3.26

Can be install every direction.

CV-10P DISCO CHECK VALVE / BRASS

The curves given in the chart are valid for water at 20°C.
 To read the pressure drop for other fluids the equivalent water volume flow rate must be calculated and used in the graph.
 The values indicated in the chart are applicable to spring-loaded valves with horizontal flow.


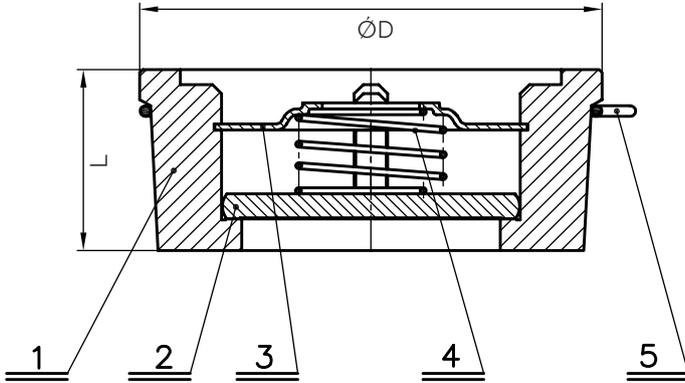


SPARE PARTS		CV 10/P
1	Body	MS58 Brass
2	Disc	Stainless Steel
3	Spring Press Segment	Stainless Steel
4	Disc Press Segment	Stainless Steel
5	Centering Cylinder	Stainless Steel

DIMENSIONS										
Dia. mm	15	20	25	32	40	50	65	80	100	
L (mm)	16	19	21	27	31	40	46	50	60	
D (mm)	39	46	54	70	80	96	113	130	150	

OPEN PRESSURE MBAR				
DN	Flow Direction			
	Without Spring ↑	With Spring		
		↑	⇒	↓
15	2.5	25	22.5	20
20	2.5	25	22.5	20
25	2.5	25	22.5	20
32	3.5	27	23.5	20
40	4	28	24	20
50	4.5	29	24.5	20
65	5	30	25	20
80	5.5	31	25.5	20
100	6.5	33	26.5	20

Pressure Drop Chart

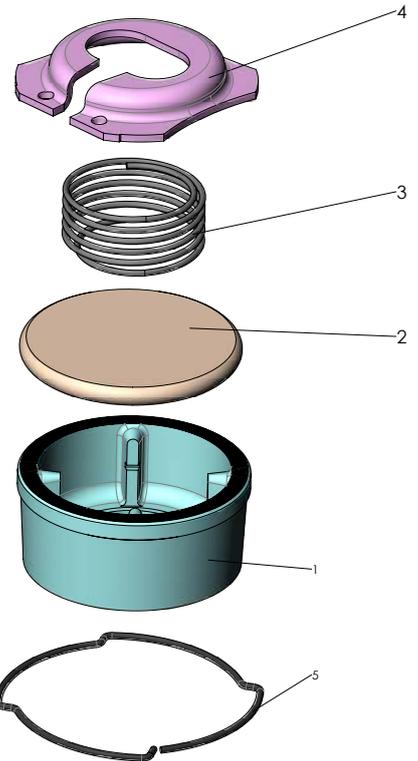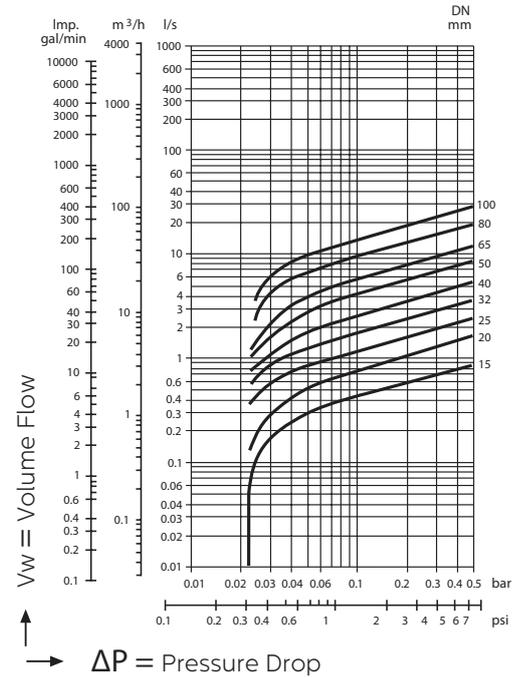

HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
 Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
 info@ayvaz.com | www.ayvaz.com

Cona Caserta/Italy
 Tel: +39 0823 187 3988
 rmlaro@ayvaz.com

Ayvaz Germany Viernheim/Germany
 Tel: +49 62046014399
 germany@ayvaz.com

Ayvaz Ukraine Kiev/Ukraine
 Tel: +380 44 390 57 57
 info@ayvaz.com.ua

Tricorr Warsaw/Poland
 Tel: +48 530 030 810
 +48 533 603 335
 tricorr@tricorr.eu

Ayvaz Azerbaijan Baku/Azerbaijan
 Tel: +99 (455) 579-84-32
 ahayatov@ayvaz.com

Ayvaz Egypt Cairo/Egypt
 Tel: +20 122 819 78 29
 andrew.eid@ayvaz.com

Ayvaz Gulf Dubai/U.A.E
 Tel: +971 563550822
 +971 501306871
 mideast@ayvaz.com

Ayvaz China Ningbo/China
 Tel: +86 152 5830 7361
 msahin@ayvaz.com

Ayvaz Kazakhstan LLP Almaty/Kazakhstan
 Tel: +7 (727) 327 97 57
 info_kz@ayvaz.com

Ayvaz N Ispirih/Bulgaria
 Tel: +359 8431 27 32
 office@ayvaz-n.eu

Ayvaz Serbia Belgrade/Serbia
 Tel: +381 61 658 70 52
 yakbiyik@ayvaz.com

Ayvaz Vietnam HCMC/Vietnam
 ggursoy@ayvaz.com
 Tel: +84 89 8508345

Ayvaz Americas Rhode Island/USA
 Tel: +1 401 737 8380
 americas@ayvaz.com